

Mark scheme - Materials

Question			Answer/Indicative content	Marks	Guidance
1			B	1	<u>Examiner's Comments</u> This question was based on the simple understanding of compression of material in the form of a concrete slab. About two thirds of the candidates opted for the correct answer B. The majority of the remaining candidates opted for C. Point C of the slab would be under maximum tension. Only a very small number of candidates, mainly from the lower quartile, went for either A or D.
			Total	1	
2			C	1	
			Total	1	
3			C	1	
			Total	1	
4			C	1	
			Total	1	
5			D	1	<u>Examiner's Comments</u> The tension for both wires is the same, yet wire X has half of the cross-sectional area. This means the stress for X will be twice that of Y. Strain = stress/Young modulus, so with half of the stress and (120/200) of the Young modulus, the strain for X will be $2 \times (200/120)$ or times that of the strain for Y. The original lengths for X and Y are the same, so the extension of X will be 3.3 times that of Y.
			Total	1	
6			D	1	
			Total	1	
7			C	1	
			Total	1	
8			D	1	
			Total	1	
9			B	1	<u>Examiner's Comments</u> All of the questions showed a positive discrimination, and the less able candidates could access the easier questions. The questions in Section A do require careful reading and scrutiny. Candidates are advised to reflect carefully before recording their response in the box. Candidates must

3.4 Materials

					endeavour to use a variety of quick techniques when answering multiple choice questions.														
			Total	1															
10			D	1															
			Total	1															
11			D	1	Examiner's Comments All of the questions showed a positive discrimination, and the less able candidates could access the easier questions. The questions in Section A do require careful reading and scrutiny. Candidates are advised to reflect carefully before recording their response in the box. Candidates must endeavour to use a variety of quick techniques when answering multiple choice questions.														
			Total	1															
12			D	1															
			Total	1															
13			1.6 (× 10 ⁻³ m).	B1															
			Total	1															
14			The maximum (tensile) stress a material can withstand (before it breaks)	B1	Examiner's Comments Ultimate tensile strength is the maximum stress a material can withstand without breaking or failing. The most common incorrect answer included descriptions of force rather than stress.														
			Total	1															
15			D	1															
			Total	1															
16	a		<table><tr><td><i>F</i> / N</td><td><i>e</i> / cm</td></tr><tr><td>0</td><td>0.0</td></tr><tr><td>0.49</td><td>1.0</td></tr><tr><td>0.98</td><td>1.8</td></tr><tr><td>1.47</td><td>2.8</td></tr><tr><td>1.96</td><td>3.6</td></tr><tr><td>2.45</td><td>4.6</td></tr></table>	<i>F</i> / N	<i>e</i> / cm	0	0.0	0.49	1.0	0.98	1.8	1.47	2.8	1.96	3.6	2.45	4.6	B1	Note Column heading required and values in table. Allow 0 for 0.0 Not 1 for 1.0 Examiner's Comments A surprisingly number of candidates either did not include the heading in the table or wrote "0.9" or "1" to one significant figure rather than "1.0".
<i>F</i> / N	<i>e</i> / cm																		
0	0.0																		
0.49	1.0																		
0.98	1.8																		
1.47	2.8																		
1.96	3.6																		
2.45	4.6																		
	b		y-axis labelled correctly <i>e</i> / cm	B1	Allow extension / cm or <i>e</i> (cm) for <i>e</i> / cm														
			y-axis scale is simple and uses at least half the graph paper	B1	Note axis tick labels must be at least every two large squares (4 cm)														
			Data points plotted correctly.	B1	Check two data points (0.98, 1.8) and (2.45, 4.6) Thickness of each point must be less than half a small square														

3.4 Materials

			Straight line of best fit drawn with a straight edge / ruler	B1	Not freehand / wobbly line Examiner's Comments The graph was drawn well with most candidates labelling the axis and using a simple scale which covered more than half the y-axis. Occasionally candidates lost a mark because of a miss-plot.
	c		Gradient in the range 1.80 to 1.94 OR 0.0180 to 0.0194	B1	Allow 1.8 or 1.9 OR 0.018 or 0.019 Not 2 OR 0.02 Ignore POT errors Ignore significant figures Examiner's Comments This question was well answered. It was pleasing to see that the majority of the candidates clearly indicated the points on their line used to determine the gradient.
	d		$k_2 = \frac{1}{\text{gradient}} = \frac{1}{(c)}$ Correct value for k_2 <u>and</u> correct unit N cm^{-1} or N m^{-1} and given to 2 or 3 significant figures	C1 A1	Note expect about $0.55 (\text{N cm}^{-1})$ or $55 (\text{N m}^{-1})$ Note unit must be with correct power of ten Examiner's Comments In this question candidates were required to use the gradient value to determine a value for the spring constant. Many candidates did not realise that the spring constant was the inverse of the gradient value. A common error was determining k and then dividing it by two. This question also required candidates to include a suitable unit and give the answer to an appropriate number of significant figures. Some candidates made a power of ten error by not converting centimetres to metres; other candidates either gave the answer to one significant figure or four or five significant figures.
	e		Hooke's law: Extension is (directly) proportional to the load (provided elastic limit not exceeded) Graph is not a <u>straight line passing through the origin</u> so Hooke's law is not obeyed OR Graph is a <u>straight line passing through the origin</u> so Hooke's law is obeyed	B1 B1	Examiner's Comments A good number of candidates quoted Hooke's law; candidates should be encouraged to define any symbols used. Many candidates stated that to prove a directly proportional relationship a straight line should be produced but omitted to state that the straight line should pass through the origin.
	f		$k_1 = 2 \times (d) \text{ or springs in series} = k / n$ $\frac{2}{3}$	C1 A1	Allow $F = k_1e = k_22e = k_33e$ Note 2:3 scores one mark Allow 0.66, 0.67 Examiner's Comments Candidates found this part difficult; it was often omitted and where candidates did attempt it they ended up with the inverse ratio of 1.5.

3.4 Materials

			Total	12	
1 7	a		arrow down through centre of ball labeled weight or W or mg or 1.2 N	B1	zero if any other arrows or forces present Examiner's Comments There were some carelessly drawn arrows on the diagram but otherwise this was done well. There were some arrows labelled <i>centripetal force</i> .
	b	i	(horizontally) mv^2/r (or $mr\omega^2$) = $T \sin \theta$ and (vertically) W or $mg = T \cos \theta$ ($\tan \theta = v^2/rg$ or rw^2/g) $\tan \theta = 0.045 \times 4 \times 9.87 \times 2.2 / 9.81$ or $0.48 / 1.2 (= 0.40)$ $\theta = 22^\circ$	M1 A1 A0	accept figures in place of algebra, $r = 0.045\text{ m}$ $v = 0.42\text{ m s}^{-1}$ $\omega = 3\pi\text{ rad s}^{-1}$; $rw^2 = 4.0\text{ m s}^{-2}$; $W = 1.2\text{ N}$ and $m = 0.12\text{ kg}$ and $mr\omega^2 = 0.48\text{ N}$ accept labelled triangle of forces diagram N.B. this is a <i>show that Q</i> ; sufficient calculation must be present to indicate that the candidate has not worked back from the answer
		ii	$k = (mg / x_0 = 1.2 / 0.050) = 24\text{ (N m}^{-1}\text{)}$ ($T = mg / \cos \theta = kx$ giving) $x = 1.2 / 24 \cos 22$ $x = 0.054\text{ (m)}$	C1 C1 A1	or solution by ratios Examiner's Comments About half of the candidates completed the angle calculation successfully with a slightly smaller number finding the correct extension of the string.
	c		($y = \frac{1}{2}gt^2 = 0.18 = 0.5 \times 9.81 \times t^2$ giving $t = 0.19\text{ (s)}$ ($x = vt = 0.42 \times 0.19 = 0.08\text{ (m)}$) distance = $\sqrt{(r^2 + x^2)} = \sqrt{(0.0020 + 0.0064)} = 0.092\text{ (m)}$	C1 C1 C1 A1	alt: projectile motion: $x = vt$, $y = \frac{1}{2}gt^2$ $y = \frac{1}{2}g(x/v)^2$ ecf (b)i for v ; $x^2 = 2yv^2/g$ $= 2 \times 0.18 \times 0.42^2/9.81$ Examiner's Comments About half of the candidates found the time for the ball to fall to the bench. Most then managed to find the horizontal distance from the point of release, but half forgot that the point of reference in the question was the centre of rotation so failing to complete the calculation.
	d		T increases or string stretches or angle θ increases to provide / create a larger centripetal force	M1 A1	allow mv^2/r or $mr\omega^2$ in place of <i>centripetal force</i> causality must be implied to gain the A mark Examiner's Comments About half of the candidates appreciated that the tension in the string increased or that the angle of the string to the vertical increased. Most answers gave the impression that the <i>centripetal force</i> was a <i>real</i> force rather than its provision being necessary for the ball to follow a circular path
			Total	12	

3.4 Materials

1 8			D	1	
			Total	1	
1 9			The extension of each spring is halved because the force in each spring is halved. (Hence the force constant is $2k$.)	B1	Allow $F = kx$, x is halved for the same F , hence k doubles.
			Total	1	
2 0			B	1	
			Total	1	
2 1			B	1	Examiner's Comments This question was slightly more challenging.
			Total	1	
2 2			A	1	
			Total	1	
2 3			C	1	
			Total	1	
2 4			C	1	
			Total	1	
2 5			C	1	
			Total	1	
2 6			D	1	Examiner's Comments The Young modulus is found by calculating the initial gradient of the material's stress-strain graph. The initial portion appears to be a straight line from the origin to the point (0.1, 120). The units on this graph are megapascals and %. This means the co-ordinates of the chosen point are in fact $(0.1 \times 10^{-2}, 120 \times 10^6)$. Many candidates forgot to convert the strain into a decimal and left it as a percentage. Their answer was a factor of a 100 out, ie answer B. The correct answer is $120 \times 10^6 / 0.1 \times 10^2 = 1.2 \times 10^{11}$ Pa. This is answer D.
			Total	1	
2 7			C	1	
			Total	1	


3.4 Materials

28		C	1	
		Total	1	
29		B	1	Examiner's Comments This question proved particularly straightforward and accessible to nearly all candidates.
		Total	1	
30		A	1	Examiner's Comments This question proved particularly straightforward and accessible to nearly all candidates.
		Total	1	
31		B	1	
		Total	1	
32		C	1	
		Total	1	
33		D	1	
		Total	1	
34		$(A =) \pi \times 0.0021^2$ or 1.39×10^{-5} (m ²) $(\sigma) = 2200 / \pi \times 0.0021^2$ $\sigma = 1.6 \pi 10^8$ (Pa)	C1 A1	Allow 1 marks for $4(.0) \times 10^7$; diameter used as radius Answer is 1.59×10^8 Pa to 3sf
		Total	2	
35	a	GPE loss = $mgh = 0.60 \times 9.81 \times 0.050 = 0.29$ J	A1	
	b	$EPE = \frac{1}{2} F \times = 0.50 \times 5.88 \times 0.05$ $= 0.147$ J (or $k = F / \times = 5.88 / 0.050 = 118$ N/m, $EPE = \frac{1}{2} k x^2 = \frac{1}{2} \times 118 \times 0.050^2$ $= 0.147$ J)	M1 A1	Allow answers to 2 s.f.
	c	GPE $\rightarrow$ EPE + KE (when falling)	B1	
		EPE $\rightarrow$ GPE + KE (when rising)	B1	

3.4 Materials

			Some energy dissipated as heat as oscillates (because of air resistance / friction)	B1	
			Total	6	
3 6			Greater area under the graph (from 3 mm to 4 mm) / greater average force from (3 mm to 4 mm) Mention of work done = average force x distance or work done = area under graph	B1 B1	ORA Allow: labelled/annotated diagram Allow energy (transferred) instead of work done Allow 2 marks for arguments including reference to $W = \frac{1}{2} kx^2$ and constant k and greater average x <u>Examiner's Comments</u> This question is best answered by referring to the graph in the question. Exemplars 1 and 2 indicate the difference between a low level and a high level response. Exemplar 1 Work is the force applied over a distance. If initial distance is larger then the work will be larger. [2] This exemplar shows a response that contains broadly true statements yet is only loosely linked to the context and so scored zero marks. Exemplar 2 work done is equal to the area under the force extension graph and this area is larger for the area between 3 + 4 mm than 1 + 2 mm. [2] This response is clearly and specifically about this context and uses the graph as supporting evidence. The link to the graph is that the area gives the work done and that a larger area for one region means a larger amount of work done for that region.
			Total	2	
3 7	a	i	Missing data point and error bar plotted correctly.	B1	Allow $\frac{1}{2}$ square tolerance.
		ii	Force measured by pulling back plate with a newton-meter.	B1	
		ii	Extension measured with a ruler (placed close to the transparent plastic tube).	B1	
		ii i	Best fit line drawn correctly and gradient determined correctly.	B1	Ignore POT for this mark; gradient = 50 ± 4 (N m ⁻¹)

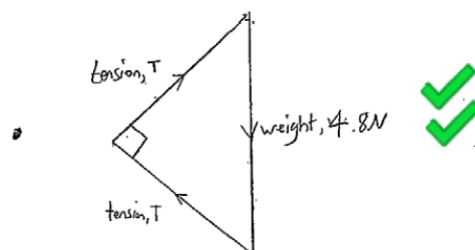
3.4 Materials

	ii i	Worst fit line drawn correctly and its gradient determined correctly.	B1	Note: The line must have a greater/smaller gradient than the best fit line and must pass through all the error bars. Ignore POT for this mark.
		ii i	2k = 50 (N m ⁻¹), therefore k = 25 (N m ⁻¹)	B1 Possible ECF.
		ii i	Absolute uncertainty determined correctly.	B1 Possible ECF within calculation.
	i v	$F \propto x$ / straight line passing through the origin.	B1	
	v	energy stored = $\frac{1}{2} \times 50 \times 0.12^2$	C1	Possible ECF from (iii)
	v	$\frac{1}{2} \times 50 \times 0.12^2 = \frac{1}{2} \times 0.39 \times v^2$	C1	Allow 1 mark for $v = 0.96 \text{ m s}^{-1}$; used k for single spring
	v	$v = 1.4 \text{ (m s}^{-1}\text{)}$	A1	
b		force constant of spring arrangement) = $\frac{2k}{3}$	M1	
		$\frac{2k}{3}x = ma$	M1	
		$a = \frac{2}{3 \times 0.39}kx$ $a = 1.7 \text{ kx}$	A0	
		Total	13	
3 8		Glass: A straight line from the origin.	B1	Ignore arrows
		Rubber: A correct sketch for loading and unloading sections, with the graph starting and finishing at the origin. 	B1	Allow either arrows or labelled curves Examiner's Comments Candidates needed to indicate the loading and unloading directions on the rubber curve. For the rubber curve, a number of candidates indicated that the rubber was increasing its strain when the load was being removed. Where a straight line is intended, a ruler should be used.
		Total	2	
3 9		Maximum energy is transferred between tower (driver) and sphere	B1	allow causes maximum damping <u>of the tower</u> or maximum amplitude <u>of the sphere</u> /AW
		when sphere (driven) is at/close to the natural frequency <u>of the tower</u> or in this forced oscillation/resonance situation	B1	allow AW e.g. sphere must be driven close to/at the natural/resonance frequency <u>of the tower</u> Examiner's Comments The answers gave a clear indication as to how well the candidates understood a resonance situation. Many omitted to explain which of the three oscillating elements were acting as drivers and which were driven. The candidate who wrote the answer (exemplar 3) shown here has some understanding of the situation but has failed to communicate it clearly to

3.4 Materials

				the reader. Exemplar 3 <i>because the maximum amplitude is produced when the system is resonant which is when the natural frequency is equal to the driving frequency and the natural frequency is 0.25 Hz so resonant when driving freq = 0.25 Hz</i> The ball was often quoted as just acting against the tower to reduce the amplitude rather than using the clue at the end of the initial paragraph about the energy drawn from the tower being absorbed by the dampers. Hence the requirement for the ball to be given a large amplitude or absorb the maximum amount of energy.
		Total	2	
40		Area increases by a factor of four / extension decrease by factor of four	M1	
		Elastic strain energy decreases by a factor of four	A1	
		Total	2	
41	a	$2 \times T^2 = 4.8^2$ or $2T \sin 45^\circ = 4.8$ or $T = 4.8 \sin 45^\circ$ $T = 3.39(4)(\text{N})$	B1 B1	Note: $\sin 45^\circ = \cos 45^\circ$ Note: T must be given to at least 3 SF Examiner's Comments This question was good discriminator, where the top-end candidates could demonstrate their powers of analysis. The success in (c) was very much dependent on a well-annotated triangle of forces in (b). Most triangle of forces were workable but lacked detail. Missing labels and incorrect direction of the force arrows were the main misdemeanours. As expected, candidates used a range of methods to show the force in the extended spring was 3.4 N. In order of popularity, the techniques were using Pythagoras' theorem, using trigonometry, resolving forces in the vertical direction and sine (or cosine) rule. It is sensible to show the final answer to more significant figures than required in a 'show' question. Exemplar 6

- (b) Sketch a **labelled** triangle of forces diagram for the three forces acting at point X. You do not need to draw this diagram to scale.



- (c) Show that the tension T in each extended spring is 3.4 N.

$$T^2 + T^2 = 4.8^2$$

$$2T^2 = 23.04$$

$$T^2 = 11.52$$

$$T = 3.39 \text{ N}$$

~~3.4 N~~

$\rightarrow 3.4 \text{ N}$

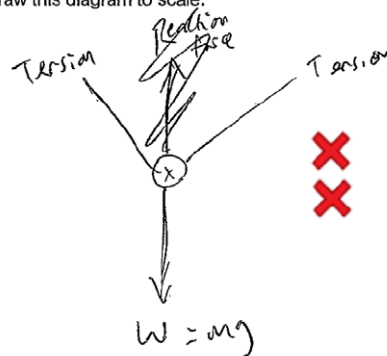
This exemplar illustrates a flawless answer from a top-end candidate.

The triangle of forces is perfect – all labels clear and the pivotal angle 90° between the two tensions marked. The calculation in (c) makes an excellent use of this triangle to show that the force is 3.39 N and hence 3.4 N.

Contrast the above excellent solution with the exemplar shown below from a grade C candidate.

Exemplar 7

- (b) Sketch a **labelled** triangle of forces diagram for the three forces acting at point X. You do not need to draw this diagram to scale.



- (c) Show that the tension T in each extended spring is 3.4 N.

$$4.8 \sin(45) = 3.39 \text{ N}$$

~~4.8 N~~

$\approx 3.4 \text{ N}$

The triangle of forces in (b) is simply not right.

However, in (c), the analysis is correct and shows another plausible

3.4 Materials

					method for securing the 2 marks. Again, it is good to see the penultimate value for the force given to more than two significant figures.
	b		$3.4 = 24x \text{ or } (x =) \frac{3.4}{24} \text{ or } (x =)$ $0.14(17)(\text{m})$ $(E = \frac{1}{2} \times 24 \times 0.1417^2 \text{ or } E = \frac{1}{2} \times 3.4 \times 0.1417)$ energy = 0.24 (J)	C1 A1	Allow the C1 mark for $E = 3.4^2/(2 \times 24)$ Allow 3.39(4) N No ECF from (c)
			Total	4	
4 2	a	i	(Vernier) Calliper or micrometer (screw gauge)	B1	Not rule(r) <u>Examiner's Comments</u> This question was well answered with most candidates stating either Vernier calliper or a micrometer screw gauge.
		ii	2.52 ± 0.08	B1 B1	Allow (2.52-2.43 =) 0.09 or (2.59-2.52 =) 0.07 <u>Examiner's Comments</u> Most candidates correctly calculated the mean diameter of the ball. A much smaller proportion of the candidates determined the absolute uncertainty in the diameter correctly. In this case, the range was 0.16 cm, so the absolute uncertainty was 0.08 cm. Examiners allowed the maximum value minus average value or average value minus minimum value.  AfL When measurements are repeated the absolute uncertainty is given by: Absolute uncertainty = $\frac{1}{2}$ x range = $\frac{1}{2}$ x (maximum value – minimum value)
		ii i	Volume $\frac{4}{3} \times \pi \times (1.26 \times 10^{-2})^3$ = $= 8.379 \times 10^{-6}$ $8.4 \times 10^{-6} \text{ m}^2$	M1 A0	$\frac{1}{6} \times \pi \times (2.52 \times 10^{-2})^3$ or $\frac{4}{3} \times \pi \times \left(\frac{2.52 \times 10^{-2}}{2}\right)^3$ <u>Examiner's Comments</u> This was another “show” question. Many candidates find dealing with standard form terms in their calculator difficult.

3.4 Materials

					Candidates needed to show clearly the conversion of the diameter in cm to radius in m. There was some evidence of candidate just adding a 10^{-6} power to their answer.
		i v	$\frac{0.023}{8.4 \times 10^{-6}}$ or 2738 2700 (kg m^{-3}) or 2.7×10^3 (kg m^{-3})	C1 A1	Note 2745 if using calculator value from (iii) Note must be two significant figures Allow one mark for 2.7×10^6 (kg m^{-3}) Examiner's Comments In this question, most candidates were able to determine the density correctly although, a few candidates did not change the mass in gram to kilogram. A large number of candidates did not give their answer to an appropriate number of significant figures; the common answer being 2738 kg m^{-3}. In this case, the mass was given to two significant figures and the volume was calculated from data give to three significant figures, thus the final answer should be given to the same number of significant figures as the least significant data, i.e. to two significant figures.
		v	$\frac{1}{23}$ or $\frac{0.08}{2.52}$ or $\frac{0.24}{2.52}$ or 4.3% or 3.2% or 9.5% 14% (13.8%)	C1 A1	Allow ECF from (ii) – 3.6% or 10.7% for $\Delta d = 0.09$ Allow maximum/minimum methods Note 13% for $\Delta d = 0.07$ or 15% for $\Delta d = 0.09$ [ECF 5.5% for $\Delta d = 0.01$] Examiner's Comments The majority of candidates were able to determine the percentage uncertainty in the mass correctly. Fewer candidates realised that the percentage uncertainty in the volume was three times the percentage uncertainty in the diameter. Candidates who did well, clearly showed their working. Some candidates tried to use a maximum/minimum method. This was a more complex method and more difficult for candidates to gain the correct answer. In this case, the maximum mass needed to be divided by the minimum volume or the minimum mass needed to be divided by the maximum volume  AFL How to use percentage uncertainties. Exemplar 5 (iv) Determine the percentage uncertainty in ρ. <i>Handwritten student work:</i> $\begin{aligned} \% \rho &= \frac{0.03}{2.52} \times 100 = 1.17\% \\ \% V &= 3.17\% \times 3 = 9.52\% \\ \% m &= \frac{1}{23} \times 100 = 4.347\% \\ \text{percentage uncertainty} &= 13.87\% \quad (2) \end{aligned}$ The candidate's answer is logically structured showing the percentage

3.4 Materials

					uncertainty in the mass and volume and then adding them together so gaining both marks. An answer of 14% would have been acceptable.
	b		Extension = 0.096 – 0.078 or 0.018 m Weight = 0.023 x 9.81 or 0.22563 13 (N m⁻¹)	C1 C1 A1	Allow ECF for incorrect mass conversion from (iv) Allow 12.6 (N m⁻¹) or 12.5 (N m⁻¹) <u>Examiner's Comments</u> The majority of the candidates clearly showed their working and calculated the force constant correctly. Some incorrectly used the energy stored equation.
	c	i	Apparent weight = 0.01 x 13 (= 0.13 N) (Upthrust = 0.226 - 0.13) = 0.10 (N)	C1 A1	Allow ECF from (b) Allow 0.008 x 12.5 Allow 0.1 (N) (1sf) <u>Examiner's Comments</u> In this question, many candidates calculated the apparent weight and then incorrectly assumed that this was the upthrust. Other errors included using the incorrect values for length to determine the extension. Some candidates correctly determined the upthrust by determining the change in extension.
		ii	$\rho = \frac{0.10}{9.81 \times 8.4 \times 10^{-6}}$ 1200 (kg m⁻³)	C1 A1	Allow ECF from (i) <u>Examiner's Comments</u> Candidates generally found this last question challenging. Some candidates who did less well, attempted to use the equation for liquid pressure. Candidates who did well again clearly showed their reasoning.
			Total	15	
4 3	a		Arrow vertical down <u>and</u> an arrow opposite to the frictional force. Both arrows labelled correctly.	M1 A1	Allow weight / <i>mg</i> / <i>W</i> for the downward arrow <u>and</u> tension / <i>T</i> / 'force in rod' / 'force in tow bar' / 'driving force' for the 'upward' arrow
	b		(<i>W_s</i> =) 1100 × 9.81 × sin 10° or 1100 × 9.81 × cos 80° (<i>W_s</i> = 1874 N or 1900 N)	C1 A0	Allow <i>g</i> instead of value
	c		force = 1900 + 300 force = 2200 (N)	A1	Allow 1870 + 300 = 2170 (N)

3.4 Materials

		d	(distance =) $120 / \sin 10^\circ$ or 691 (m) (work done =) 2200×691 work done = 1.5×10^6 (J)	C1 C1 A1	Allow ECF from (c) Allow ECF from an incorrect attempt at first mark.
		e	(A =) $\pi \times 0.006^2$ or 1.1×10^{-4} (m²) (stress =) $\frac{2200}{\pi \times 0.006} \frac{\text{N}}{\text{m}^2}$ and $2.0 \times 10^{11} = \frac{\text{stress}}{\text{strain}}$ $x = 4.8 \times 10^{-5}$ (m)	C1 C1 A1	Allow ECF from (c) Allow $x (=FL/EA) = \frac{2174 \times 0.5}{2.0 \times 10^{11} \times 1.1 \times 10^{-4}}$ Allow 2 marks for 1.2×10^{-5}; 1.2×10^{-2} m used as radius Allow answer between 4.7 and 5.1×10^{-5} (m)
			Total	10	
4 4	a	i	Data point plotted to within $\pm \frac{1}{2}$ small square and correct line of best fit through all the data points.	B1	
		ii	Gradient of line determined.	M1	
		ii	$E = \text{gradient} = (8.8 \pm 0.1) \times 10^{10}$ (Pa).	A1	Allow 1 mark for $(8.8 \pm 0.1) \times 10^n$ Pa; where $n \neq 10$
	b		The actual cross-sectional area will be smaller.	B1	
			The actual stress values on the graph will be larger (because stress $\propto$ area ⁻¹)	B1	
			The gradient of the graph will be larger; hence the Young modulus of the metal must be larger than the student's value.	B1	
			Total	6	
4 5			$1.4 \times 10^{10} = \frac{1.1 \times 10^5}{\text{strain}}$ (Any subject) / strain = 7.86×10^{-6} $x = \frac{1.1 \times 10^5}{1.4 \times 10^{10}} \times 2.3$ $x = 1.8 \times 10^{-5}$ (m) or $1.1 \times 10^5 = \frac{6500}{A}$ / $A = 0.059$ (m²)	C1 C1 A1	Possible ECF from (a)

3.4 Materials

			$(F = \frac{EAx}{L}); \quad 6500 = \frac{1.4 \times 10^{10} \times 0.059x}{2.3}$ (Any subject) $x = 1.8 \times 10^{-5} \text{ (m)}$	C1 C1 A1	Examiner's Comments This was a notable success for most of the candidates. Examiners were pleased to see a range of techniques being used to get to the correct answer of $1.8 \times 10^{-5} \text{ m}$. Most of the answers were well-structured and showed good use of calculators. A small number of candidates correctly calculated the strain but then struggled to rearrange the expression for strain to determine the compression.
			Total	3	
4 6			$x = \frac{TL}{EA}$ $x = \frac{460 \times 1.73}{210 \times 10^9 \times 11 \times 10^{-6}}$ $x = 3.45 \times 10^{-4} \text{ (m)}$	C1 C1 A1	Note x must be the subject Allow alternative methods e.g. determines stress ($4.18 \times 10^7 \text{ Pa}$) C1 determines strain (1.99×10^{-4}) C1 determines x Allow 3.4, 3.5, 3.43, 3.44 Allow 2 marks for 3.45×10^n Examiner's Comments This question required candidates to carry out several calculations. Good candidates would start by combining the definitions of stress and strain with the definition of Young modulus to give $x = \frac{TL}{EA}$ A significant number of candidates made a power of ten (POT) error either with 210 GPa or with the area of 11.0 mm^2 . Many candidates wrote the latter as $11 \times 10^{-3} \text{ m}^2$. Other lower ability candidates tried calculating the area from this value. Some candidates correctly determined the stress, then the strain and then the extension.
			Total	3	
4 7	a	i	points on the line read to the nearest half square	B1	Allow Δy for $y_2 - y_1$ and Δx for $x_2 - x_1$

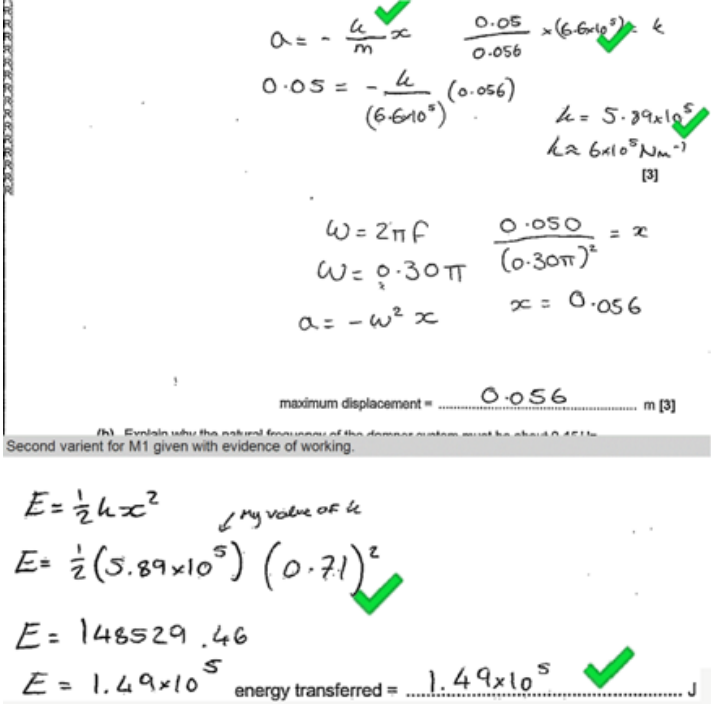
3.4 Materials

			size of triangle is greater than half the length of the drawn line and $\Delta y / \Delta x$	B1	$\Delta x \geq 0.1625$
		ii	$\left(\frac{9.81}{0.12}\right) = 81.75$ 82 N m ⁻¹ given to 2 or 3 significant figures	C1 A1	Allow ECF from (a)(i) Allow 81.8 N m ⁻¹ Note POT must be correct for given unit Allow kg s ⁻²
	b	i	steepest or shallowest line that passes through all the error bars	B1	
		ii	gradient determined: 0.10 m kg ⁻¹ or 0.13 m kg ⁻¹	B1	Allow ECF from (b)(i)
		ii	$\Delta \text{gradient} (0.13 - 0.12 \text{ or } 0.12 - 0.10)$ $\frac{\Delta \text{gradient}}{\text{gradient}} \times 100 = 8.3\% \text{ or } 17\%$ OR $\Delta k (82 - 75 \text{ or } 98 - 82)$ $\frac{\Delta k}{k} \times 100 = 8.5\% \text{ or } 20\%$	C1 A1 C1 A1	Allow ECF from (b)(i) and (ii) Not 10% without justification <u>Examiner's Comments</u> In this question, most candidates clearly identified the points on the line that were to be used for the gradient calculation. High achieving candidates clearly showed their working when determining the percentage uncertainty.
			Total	8	
4 8	a	i	$a = (-) 4\pi^2 f^2 x = 4 \times 9.87 \times 4900 \times 0.004$	C1	allow 774 (m s ⁻²)
		i	$a = 770 \text{ (m s}^{-2}\text{)}$	A1	
		ii	1 sketch showing one wavelength and 140 (Hz)	B1	both sketch and value required for 1 mark
		ii	2 driving force is around nodal point / AW;	B1	max 3 of the 4 marking points
		ii	points either side of nodal point try to move in opposite directions when force in one direction / AW;	B1	
		ii	move magnet to antinodal point; ¼ of distance between clamps	B1	not increase current
	b	i	$f \propto \sqrt{T}$ so $f = 70/\sqrt{2} = 49 \text{ or } 50 \text{ Hz}$	B1	
		ii	1 μ increases / goes up by 0.4%	B1	allow +0.4% NOT 0.4%
		ii	2 0.2%,	B1	or half of answer to (ii) 1
		ii	f is lower because μ is bigger and μ is on the bottom of the formula	B1	or greater inertia present with same restoring force / other physical argument
			Total	10	

3.4 Materials

4 9		i	Elastic: material returns to original dimensions when load is removed.	B1	
		i	Plastic: material has permanent change of shape when load is removed.		
		ii	The material is elastic because the removal of force returns the rubber to its original length.	B1	
		ii	The area under force-extension graph is work done.	B1	
		ii	Repeated stretching and releasing the rubber warms up the rubber because not all the strain energy is returned back. The area enclosed represents the amount of thermal energy. During landing, some of the aeroplane's kinetic energy is transferred to thermal energy and therefore the aeroplane does not "bounce" during landing; hence this minimises the risk to passengers.	B1	Mentioning 'hysteresis' is not enough to gain this mark.
			Total	4	
5 0		i	(Area under graph =) energy / elastic potential energy	B1	Allow work done on the elastic band
		ii	(Area of) 1 cm ² is 0.025 × 2.5 J or 0.0625 J (31 × 0.0625 =) 1.9 (J)	C1 A1	Allow other alternatives. Do not accept 0.5Fx
		ii i	Energy transferred to the surroundings / heating the rubber	B1	
			Total	4	
5 1		i	$R (= \rho L/A) = 1.8 \times 10^{-8} \times 1500 / 1.1 \times 10^{-4}$ $R = 0.25 (\Omega)$	C1 A1	
		ii	$E = \sigma/\epsilon = T/A\epsilon$ (so $T = EA\epsilon$) $T = 1.2 \times 10^{10} \times 1.1 \times 10^{-4} \times 0.013$ $T = 1.7 \times 10^4$ (N) or 17 (kN)	C1 C1 A1	or calculation of $\sigma = 1.56 \times 10^8$ (Nm ⁻²) or $T = 1.56 \times 10^8 \times 1.1 \times 10^{-4}$
			Total	5	
5 2		i	$\omega^2 = k/m$ or $(2\pi f)^2 = k/m$ or $kA = m a_{max}$ $k = (m 4\pi^2 f^2) = 6.6 \times 10^5 \times (2\pi \times$	C1 M1	allow ω or $\omega^2 = 0.88$ or 0.89 quoted from (a) ecf value of A from (a)

3.4 Materials

			$0.15)^2$ or $(k = ma_{\max}/A) = 6.6 \times 10^5 \times 0.05/0.056$ $k = 5.9 \times 10^5 \text{ (N m}^{-1}\text{)}$	A1	as this is a 'show that' question some definite evidence of working must be shown. not $k = 6 \times 10^5$ allow answer to 2 or more SF.
		ii	$E = \frac{1}{2}kA^2 = 0.5 \times 5.9 \times 10^5 \times 0.71^2$ $E = 1.5 \times 10^5 \text{ (J)}$	C1 A1	allow value from (c)(i) or 6; or $a = (k/m)A$, $F = ma$, $E = \frac{1}{2}FA$ accept 1.48 to 1.51 or value from ecf special case: give 1/2 for $E = 3(.0) \times 10^5 \text{ (J)}$ where it is clear that 2k has been used as the spring constant <u>Examiner's Comments</u> The exercise in this section completed successfully by most candidates was to perform standard calculations stating correct formulae and showing clear working to determine the required quantities. The example (exemplar 4) shown here is of a typical neat script. The most common error was to forget to square quantities in part (ii) or to use the amplitude calculated part (a) rather than the figure given in the stem of this part. Exemplar 4  Handwritten work for Exemplar 4: $a = -\frac{k}{m}x \quad \frac{0.05}{0.056} \times (6.6 \times 10^5) = k$ $0.05 = -\frac{k}{(6.6 \times 10^5)}(0.056) \quad k = 5.89 \times 10^5 \text{ N m}^{-1}$ $\omega = 2\pi f \quad \frac{0.050}{(0.30\pi)^2} = x$ $\omega = 0.30\pi \quad x = 0.056$ $a = -\omega^2 x$ maximum displacement = 0.056 m [3] (b) Explain why the natural frequency of the damped system must be about 0.45 Hz. Second variant for M1 given with evidence of working. $E = \frac{1}{2}kx^2 \quad \text{My value of } k$ $E = \frac{1}{2}(5.89 \times 10^5)(0.71)^2$ $E = 148529.46$ $E = 1.49 \times 10^5 \text{ energy transferred} = 1.49 \times 10^5 \text{ J}$
		Total		5	
5 3	i	(230 ± 40) M Pa		B1	
	ii	Stress = $1.1 \times 10^6 / (\pi \times 0.045^2) = 173 \text{ MPa}$		C1	
	ii	173 MPa < 230 MPa		A1	AW (ecf)

3.4 Materials

		ii	So will not stretch too much in use	B1	Allow any sensible contextual suggestion
		ii	Less chance of permanent deformation or fatigue	B1	
			Total	5	
5 4		i	Use a micrometer / (Vernier) caliper	B1	Allow either along length or in different directions
		i	Measure the diameter along its length in different directions (to ensure uniform cross-section) AW	B1	
		ii	1. Any value between 0 and 2.0 (kN) 2. Any value between 2.0 and 2.2 (kN)	B1 B1	
		ii	$k = \text{gradient}$	C1	Allow 1 mark for 5.0×10^n ; $n \neq 5$ Allow $5 \times 10^5 \text{ (N m}^{-1}\text{)}$
		i	$k = 5.0 \times 10^5 \text{ (N m}^{-1}\text{)}$	A1	
			Total	6	
5 5		i	(Sum of clockwise moments = sum of anticlockwise moments) $95 \times 9.81 \times 1.80 / 120 \times 9.81 \times 1.00 / 1.60 \times T \sin 30^\circ$	C1	Note answer to 3 s.f. is $3.57 \times 10^3 \text{ (N)}$
		i	$(95 \times 9.81 \times 1.80) + (120 \times 9.81 \times 1.00) = 1.60 \times T \sin 30^\circ$	C1	
		i	$T = 3.6 \times 10^3 \text{ (N)}$	A1	
		ii	$\sigma = \frac{3.6 \times 10^3}{\pi \times 0.015^2}$	C1	Possible ECF from part (i)
		ii	$\sigma = 5.1 \times 10^3 \text{ (kPa)}$	A1	Allow 1 mark for 5.1×10^6 ; POT error Note using $3.57 \times 10^3 \text{ N}$ gives $5.05 \times 10^3 \text{ (kPa)}$
		ii	The clockwise moment increases and therefore T increases.	B1	
			Total	6	
5 6			Level 3 (5–6 marks) Clear correct explanation of terms and correct comparison of materials <i>There is a well-developed line of reasoning which is clear and logically structured. The information presented is relevant and substantiated.</i>	B1 x 6	Indicative scientific points may include: Explanation of terms - elastic : material returns to original length (when load removed) - plastic: material permanently deformed (when load removed) - brittle: elastic behaviour (only) up to breaking point/ will not deform before breaking - ductile: elastic and plastic regions before the material breaks / able to be (permanently) deformed / stretched / bent without breaking

3.4 Materials

			Level 2 (3–4 marks) Clear correct explanation of terms or correct comparison of materials or has some clear correct explanation of terms <u>and</u> some correct comparison of materials <i>There is a line of reasoning presented with some structure. The information presented is in the most-part relevant and supported by some evidence.</i> Level 1 (1–2 marks) Has limited correct explanation of terms and limited correct comparison of materials <i>There is an attempt at a logical structure with a line of reasoning. The information is in the most part relevant.</i> 0 marks No response or no response worthy of credit.	• UTS: maximum (tensile) stress a material can withstand • Young modulus = stress /strain • Young modulus = gradient of stress-strain graph Comparison of materials • Both have elastic regions • K is elastic • J has a plastic region, K does not have a plastic region • J is ductile • K is brittle • gradient of J is greater than K • Young modulus of J is greater than K • UTS of J is greater than K Examiner's Comments This was the first level of response question. A good range of marks from zero to six were credited. This type of question allows candidates to demonstrate structuring an answer logically using appropriate terms correctly. To achieve the highest marks, candidates needed to explain all six terms and compare the two materials using the terms. Some candidates in their answer included a discussion of Hooke's law. Candidates who did not achieve a Level 3 response, often did not include all the terms or incorrectly described some of terms. Often ultimate tensile strength was not understood. Answers could have been improved by explaining why the gradient was an indication of the Young modulus. Many candidates did not state that an elastic material returned to its original length when a load was removed. Some candidates who did less well, attempted to describe the material in terms of named materials, often incorrectly, e.g. J was rubber. Exemplar 3 Material J is ductile. This means the material undergoes a large amount of plastic deformation before breaking and so is used for things like wires. Material K is brittle because it does not undergo plastic deformation at all but it reaches its breaking point after only elastic deformation. It is Brittle materials like glass and cast iron have this graph because any stress they undergo they stay hooke's law. It stays hooke's law (same or extension) up until its elastic limit. Elastic deformation means it returns to its original shape once the force is removed. Plastic deformation means it does not. Young modulus is the stress ^{gradient} and can be calculated from the linearly proportional sections of the graph. J has a larger Young Modulus because the line is steeper and has a larger breaking point. J also has a larger ultimate tensile strength which means is the most stress a material can go under before breaking. The candidate has explained all the terms and there is a comparison of the two materials. The reference to Hooke's law is acceptable and does not detract from the answer and is not irrelevant.
--	--	--	--	---

3.4 Materials

				The candidate's reasoning is clear and logically structured. This is a Level 3, 6-mark answer.
			Total	6
5 7			* Level 3 (5–6 marks) All points E1, 2, 3 and 4 for equipment All points M1, 2, 3 and 4 for measurements For calculations expect C1, C2, C3 and C4 Expect at least two points from reliability <i>There is a well-developed line of reasoning which is clear and logically structured. The information presented is relevant and substantiated.</i> Level 2 (3–4 marks) Expect E1 and E2; E3 or E4 for equipment Expect M2 and two from M1, M3, M4 for measurements For calculations expect at least C3 and C4 Expect at least one point from reliability <i>There is a line of reasoning presented with some structure. The information presented is in the most-part relevant and supported by some evidence.</i> Level 1 (1–2 marks) Expect at least E1 and E2 for equipment Expect at least two from measurements Expect C5 for the calculation No real ideas for obtaining reliable results <i>The information is basic and communicated in an unstructured way. The information is supported by limited evidence and the relationship to the evidence may not be clear.</i> 0 marks	B1 × 6 The complete plan consists of four parts: Equipment used safety (E) 1. Wire fixed at one end with load added to wire. 2. Suitable scale with suitable marker on wire. 3. Micrometer screw-gauge or digital / vernier callipers for measuring diameter of wire. 4. Reference to safety concerning wire snapping. Measurements (M) 1. Original length from fixed end to marker on wire. 2. Diameter of wire. 3. Measure load. 4. New length of wire when load increased. Calculation of Young modulus. (C) 1. Find extension (for each load) or strain (for each load). 2. Determine cross-sectional area or stress. 3. Plot graph of load-extension or graph of stress-strain. 4. Young modulus = gradient × original length / area or Young modulus = gradient. 5. Calculate Young modulus from single set of measurements of load, extension, area and length. Reliability of results (R) 1. Measure diameter in 3 or more places and take average. 2. Put on initial load to tension wire and take up 'slack' before measuring original length. 3. Take measurements of extension while unloading to check elastic limit has not been exceeded. 4. Use long wire (to give measurable extension). Scale or ruler parallel to wire.


3.4 Materials

		No response or no response worthy of credit.		
		Total	6	
5 8		Level 3 (5–6 marks) Clear procedure, measurements and analysis <i>There is a well-developed line of reasoning which is clear and logically structured. The information presented is relevant and substantiated.</i> Level 2 (3–4 marks) Some procedure, some measurements and some analysis. <i>There is a line of reasoning presented with some structure. The information presented is in the most-part relevant and supported by some evidence.</i> Level 1 (1–2 marks) Limited procedure and limited measurements or limited analysis <i>The information is basic and communicated in an unstructured way. The information is supported by limited evidence and the relationship to the evidence may not be clear.</i> 0 marks No response or no response worthy of credit.	B1 x6	Indicative scientific points may include: Procedure - labelled diagram - incremental increase in load / mass until wire breaks - method of attaching wire at fixed end - method of attaching load at other end - use of safety screen / goggles to protect eyes - method of securing retort stand Measurements - measurement of load / mass - measurement of diameter - use micrometer to measure diameter - averages diameter - repeats experiment Analysis - equation to determine force, e.g. mg - equation to determine cross-sectional area or $A = \pi r^2$ (breaking) stress = (max) force / cross-sectional area or $\sigma = \frac{F}{A}$ Examiner's Comments This question was designed to test candidates' practical planning skills. It is expected that candidates should be able to apply the laboratory techniques that they have encountered to novel situations. This was the first LoR question. Candidates should explain their methods clearly and include any appropriate equations. Their account should be logical and the information given should be relevant to the experiment. In this particular question a number of candidates explained a Young modulus experiment and suggested that the breaking stress could be determined from a stress-strain graph. Good candidates clearly explained the procedure to be followed with a labelled diagram, the measurements to be taken (diameter, mass) and how the measurements would be used to determine the breaking stress.

3.4 Materials

			Total	6	
5 9		i	(stress =) $\frac{7.5}{8.2 \times 10^{-7}}$ or 9.15×10^6 (Pa) (strain =) $\frac{7.5}{8.2 \times 10^{-7} \times 2.0 \times 10^{11}}$ or 4.57×10^{-5} $x = 2.8 \times 10^{-5}$ (m) OR $E = \frac{FL}{Ax}$ $2.0 \times 10^{11} = \frac{7.5 \times 0.62}{8.2 \times 10^{-7} \times x}$ $x = 2.8 \times 10^{-5}$ (m)	C1 C1 A1 C1 C1 A1	Allow full credit for alternative methods Note answer is 2.84×10^{-5} to 3 SF Note answer is 2.84×10^{-5} to 3 SF Special case: 1 mark for 2.8×10^{-4} (m) or 2.9×10^{-6} (m); $7.5g$ or $7.5g^{-1}$ ($g = 9.81$) used instead of 7.5
		ii	acceleration at Y / deceleration at Z At Y (tension is) greater / $(T) > 7.5$ (N) At Z (tension is) less / $(T) < 7.5$ (N)	B1 B1 B1	Allow increasing velocity / increasing speed at Y Allow decreasing velocity / decreasing speed / negative acceleration at Z / slowing down Ignore 'downward acceleration' at Z Ignore drag throughout Allow $(T) > \text{weight}$ Allow $(T) < \text{weight}$
			Total	6	
6 0		i	$87.4 \cos 50^\circ$ or $68.0 \sin 10^\circ$ $F = 68.0$ (N)	C1 A1	Allow $87.4 \sin 40^\circ$ or $68.0 \cos 80^\circ$ Allow cosine and sine rules being used, e.g. $F^2 = 68.0^2 + 87.4^2 - 2 \times 68.0 \times 87.4 \times \cos 50^\circ$ or $F = 87.4 \times \sin 50^\circ / \sin 80^\circ$ or $F = 68.0 \times \sin 50^\circ / \sin 50^\circ$ Allow 2 SF answer here <u>Examiner's Comments</u> The question has a clue for making a start on this question. Most candidates did resolve the two tensions in the cables vertically. The majority of the responses were well-structured and demonstrated excellent understanding of vectors. Although not straightforward, many candidates used the correct angle when determining the vertical components of the forces. The correct answer of 68.0 N appeared on most scripts. A small number of candidates got 1 mark for just getting one of the components correct. A very small number of candidates got the correct answer by using trigonometry and triangle of forces. This is not what was expected, but full credit was given for this alternative approach. Correct responses will always score marks, even when the candidates choose not to go along the path designed by the examiners. This different approach is illustrated

3.4 Materials

				in the exemplar 6 below. Exemplar 6 Calculate the total vertical force F supplied by cables A and B by resolving the tensions in cables A and B.  $F^2 = A^2 + B^2 - 2AB \cos \theta$ $F = \sqrt{68^2 + 87.4^2 - 2 \times 68 \times 87.4 \times \cos 50}$ $= \sqrt{4622.329...}$ $= 67.98... \text{ N}$ $\approx 68.0 \text{ N (3sf)}$ $F = \dots\dots\dots 68.0 \text{ N [2]}$ The candidate has used a triangle of forces and the cosine rule to determine the net downward. As it happens, the F in this calculation is the weight of the dolphin. However, it is numerically equal to the total upward vertical force. This concise and perfect alternative technique picked up the maximum marks.
		ii	$68 = m \times 9.81$ $m = 6.9 \text{ (kg)}$	Possible ECF from (c)(i) Allow $68 = mg$ Note answer to 3 SF is 6.93 (kg) Allow $g = 9.8$; this gives 6.94 (kg) Not $g = 10$; this gives 6.8 (kg). Only the first C1 mark can be scored C1 A1 <u>Examiner's Comments</u> Almost all candidates correctly used $W = mg$ to determine the mass of the dolphin. Full marks were frequently picked up because of error carried forward (ECF) from (c)(i). There were very few cases of $g = 10 \text{ m s}^{-2}$ being used; this was penalised because $g = 9.81 \text{ m s}^{-2}$ is given in the Data, Formulae and Relationship Booklet.
		ii i	$E = \frac{\text{stress}}{\text{strain}}$ (Any subject) (Tension and E increase by the same factor of 1.29) ratio = 1.0	C1 A1 <u>Examiner's Comments</u> This question on the equation for Young modulus E was well-answered with most candidates picking up one or more marks. The extension x of a wire is given by the expression $x = \frac{FL}{EA}$, where F is the tension in the wire, L its length and A its cross-sectional area. In this question, the extension $x \propto \frac{F}{E}$. Since both F and E increase by the same factor of 1.29, this meant that the ratio is 1.00. The most frequent incorrect answers were 1.29 and 1.29^{-1} or 0.78. The majority of the candidates in the upper quartile picked up 2 marks. Exemplar 7

3.4 Materials

				(iii) The cables A and B have the same length and cross-sectional area. The material of cable B has Young modulus $1.29E$, where E is the Young modulus of the material of cable A. Both cables obey Hooke's law. Calculate the ratio $\frac{\text{extension of cable B}}{\text{extension of cable A}}$ <i>Handwritten solution:</i> $\frac{FL}{Ax} = E$ $\frac{87.4}{1.2E} = \frac{68}{E}$ $E = \frac{68}{x}$ $x = \frac{68}{E}$ $1.29E = \frac{87.4}{x}$ $x = \frac{87.4}{1.2E}$ $E = \frac{68}{x}$ $x = \frac{68}{E}$ ratio = [2] This exemplar shows a response from a top-grade candidate. The solution is much more elaborate and the response of 0.996 is given to 3 significant figures. A perfect solution that earned this candidate 2 marks.
		Total	6	
6 1		Level 3 (5–6 marks) Clear description and clear analysis <i>There is a well-developed line of reasoning which is clear and logically structured. The information presented is relevant and substantiated.</i> Level 2 (3–4 marks) Some description and some analysis or Clear description or Clear analysis <i>There is a line of reasoning presented with some structure. The information presented is in the most-part relevant and supported by some evidence.</i> Level 1 (1–2 marks) Limited description or Limited analysis <i>There is an attempt at a logical structure with a line of reasoning. The information is in the most part relevant.</i> 0 marks No response or no response worthy of credit.	B1× 6	Use level of response annotation in RM Assessor. Indicative scientific points may include: Description - Determine T by measuring several oscillations - Independent and dependent variables identified (e.g. L and T) - Variables kept constant (e.g. for L and T experiment, m is kept constant) - Repeating to determine average T - Measure length L and width w with ruler - Measure thickness t with a vernier (calliper) / micrometer - Use video/phone camera / stopwatch / data-logger and motion sensor / light gates and timer - Use top-pan balance / scales to measure m Analysis - Plot an <u>appropriate</u> graph, e.g. T^2 against L^3 or tabulate $T^2 \div L^3$ - Gradient of best line determined or average of $T^2 \div L^3$ - Use a large triangle to determine gradient - Gradient (or equivalent) related to E, e.g. gradient = $16\pi^2 m / wEt^3$ for T^2 against L^3 graph Examiner's Comments This part tested ideas about investigative experiments: there was a solid focus on elements of data-taking and instruments that should be used. Typically at A Level, analysis should include an appropriate graph and a comparison between the line of best fit and the equation under test. Putting the general equation below the given equation would make it much clearer how the candidate linked the gradient or y-intercept with the required property.
		Total	6	

3.4 Materials

6 2	i	$E = \frac{1}{2}kx^2$ or $E = mgh$ or $0.080 \times 9.81 \times 0.20$ or $\frac{1}{2} \times 60 \times x^2$ $0.080 \times 9.81 \times 0.20 = \frac{1}{2} \times 60 \times x^2$ $x = 0.072$ (m)	C1 C1 A1	
	ii	Time of flight is independent of speed/AW 1 Because distance of fall is the same and initial velocity vertically is zero / velocity is horizontal at X D increases as speed at X increases because the time of flight is constant/AW 2 D is directly proportional to speed at X	B1 B1 M1 A1	Allow algebraic answers that assume initial vertical velocity is zero/velocity is horizontal at X. Allow $d = vt$ idea "D is directly proportional to speed at X because the time of flight is constant" scores 2. Examiner's Comments This part showed that many candidates thought that the time of flight of the car depended on the take-off speed of the car. Since the car is travelling horizontally the time of flight only depends on the height of the car above the horizontal track.
		Total	7	
6 3	i	$a = 4\pi^2 f^2 \times$	C1	condition for SHM
	i	so $k = (m4\pi^2 f^2) = 1.7 \times 10^{-27} \times 4 \times 9.87 \times 43.7 \times 10^{26}$	B1	substitution
	i	$k = 292$ (N m ⁻¹)	A1	ecf if incorrect mass used
	ii	(N2 gives) $F_H = m_H a_H$ and $F_I = m_I a_I$	B1	allow total momentum = 0 at all times
	ii	(N3 gives) $F_H = F_I$ <i>can be implicit</i>	B1	SHM gives $v = 2\pi f x_{\max}$
	ii	SHM gives $a \propto (-)x$	B1	so $m_H x_H = m_I x_I$
	ii	hence $x_H/x_I = a_H/a_I = m_I/m_H = 127$	B1	accept $127 = x_H/x_I \approx 10/0.08 = 125$
		Total	7	
6 4	i	$\frac{49}{1.4 \times 10^{-7}}$ 3.5×10^8 Pa	C1 A1	
	ii	$\frac{3.5 \times 10^8}{180 \times 10^9}$ 0.0019	C1 A1	Allow ECF from (b)(i) Ignore units
	ii	0.0019×2.2	C1	Allow ECF from (b)(i) and (ii)
	i	0.0042 (m)	A1	Allow 0.0043 (m)

3.4 Materials

		i	$\frac{1}{2} \times 49 \times 0.0043$	C1	Allow ECF from (b)(i), (ii) and (iii)
		v	0.10 (J)	A1	Do not accept 1 sf
			Total	8	